




DIMENSION

All Dimensions are Approximate. Dimensions May Vary with Bucket. Refer to Operating Specifications.

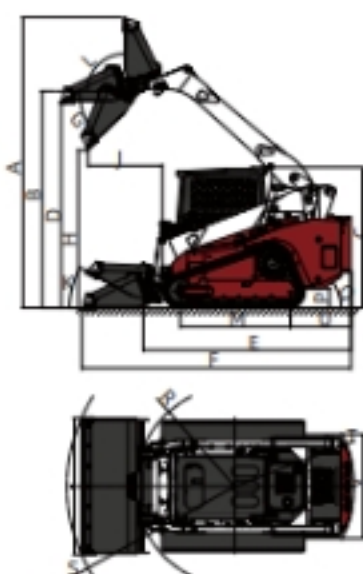

BASIC	Operating Weight (kg)	5440
	Rated Payload (kg)	1500
	Bucket Capacity (m³)	0.7
	Tipping Load (kN)	35
	Breakout Force (kN)	24
	Traction Force (kN)	42
ENGINE	LxWxH (mm)	4381*2067*2131
	Engine Model	XINCHAI4D35ZT
	Rated Power (kW/rpm)	73.5
	Displacement (L)	3.46L
	Fuel consumption (g/kw*hr)	248
	Stroke (mm)	115
	Bore (mm)	98
	Emission Standard	Tier II
HYDRAULIC SYSTEM	Hydraulic Flow - Standard (L/min)	15-160
	Type	Mechanical
	Hydraulic Pressure - Standard (Mpa)	25
	Hydraulic Flow - High Flow (L/min)	160
DRIVE TRAIN	Travel Speed -F&R (km/h)	11/7.8
	Rubber Track	450B65C0K0E3
ELECTRIC	Voltage(V)	12
	Capacity(Ah)	120
SERVICE REFILL CAPACITY	Cooling System (L)	12
	Engine Crankcase (L)	10
	Fuel Tank (L)	100
	Hydraulic Tank (L)	38

TECHNICAL PARAMETERS

NO.	DESCRIPTION	UNIT	DATA
A	Max. Operation Height	mm	4400
B	Bucket Pin Height	mm	3270
C	Cab Roof Height	mm	2128
D	Max. Height At Bucket Levelled	mm	2387
E	Length Without Attachment	mm	3145
F	Length With Standard Bucket	mm	4082
H	Dumping Height	mm	2440
J	Reach Rollback	mm	1225
M	Wheelbase	mm	1080
P	Ground Clearance	mm	290
R	Front Turning Radius Without Attachment	mm	1700
S	Front Turning Radius	mm	2715
T	Rear Turning Radius	mm	1800
U	Tail Length	mm	919
V	Center Distance between Two Wheels	mm	1515
W	Bucket Width	mm	2058
G	Dumping Angle At Max. Height	°	43
K	Bucket Angle On Ground	°	33
L	Bucket Rollback Angle At Max. Height	°	90
Q	Start Angle	°	32

OPTIONAL

Cold Start	Snow Blade
Spiral Drill	Tree Planter
Excavator	Snow Blower
Bevel Sweeper	Four In One Bucket
Closed Sweeper	Hydraulic Coupler
Forks	Rearview mirror heating function

Feature

- Xinchai powerful engine enables the loader to easily cope with various working conditions.
- Strong flexibility, with two-speed control, able to move and operate freely in small Spaces.
- With low center of gravity design and all-terrain drive, it can maintain excellent stability under various complex working environments and improve operation safety.
- Integral frame structure, higher strength, better stability.
- The cab adopts three-dimensional lattice guardrail, sound insulation and heat insulation treatment to provide a comfortable driving environment and reduce the driver's fatigue.
- High precision control and braking system to improve work efficiency and accuracy.
- The use of international quick change device, can quickly and easily replace a variety of accessories. To realize the application of different work, to realize the versatility of work ability.
- The design is simple and easy to maintain, reducing downtime and maintenance costs.

LONKING 龙工
Efficiency Rules the Future

CDM315T

Compact Track Loader



- ENGINE MODEL : XINCHAI4D35ZT
- RATED POWER : 73.5KW
- OPERATING WEIGHT : 5440kg
- RATED PAYLOAD : 1500kg
- BUCKET CAPACITY : 0.7m³